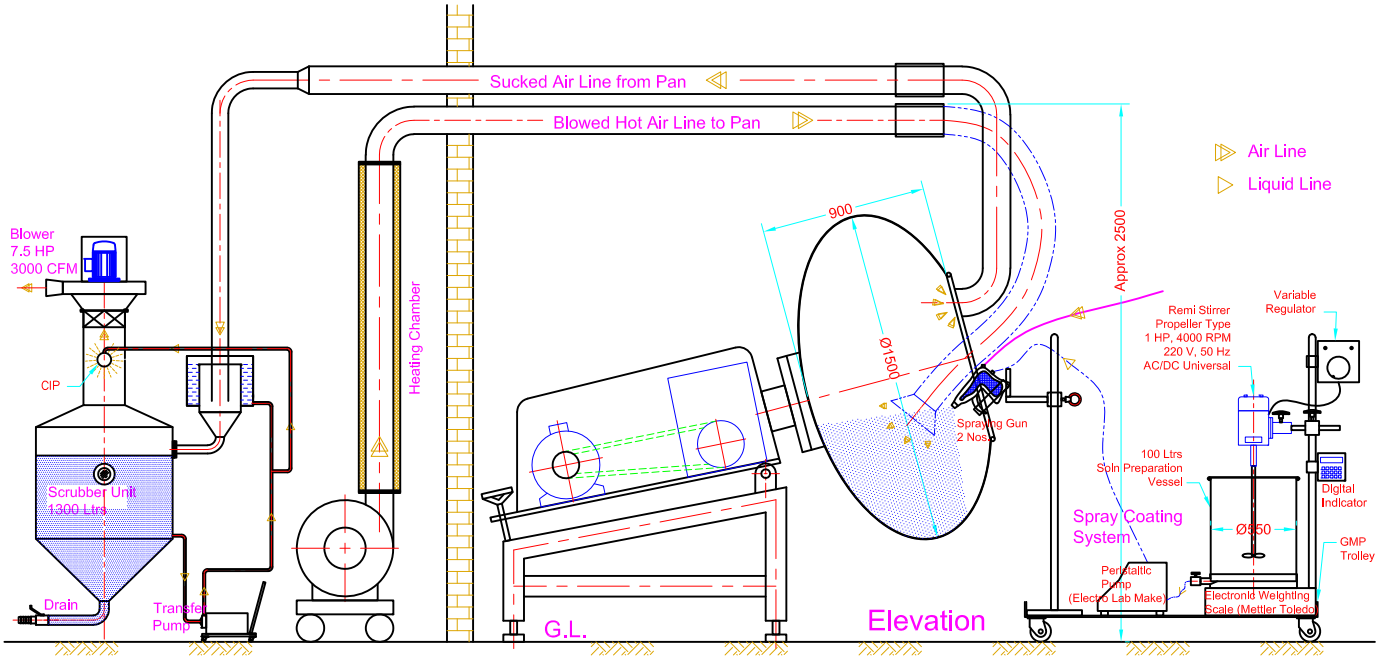

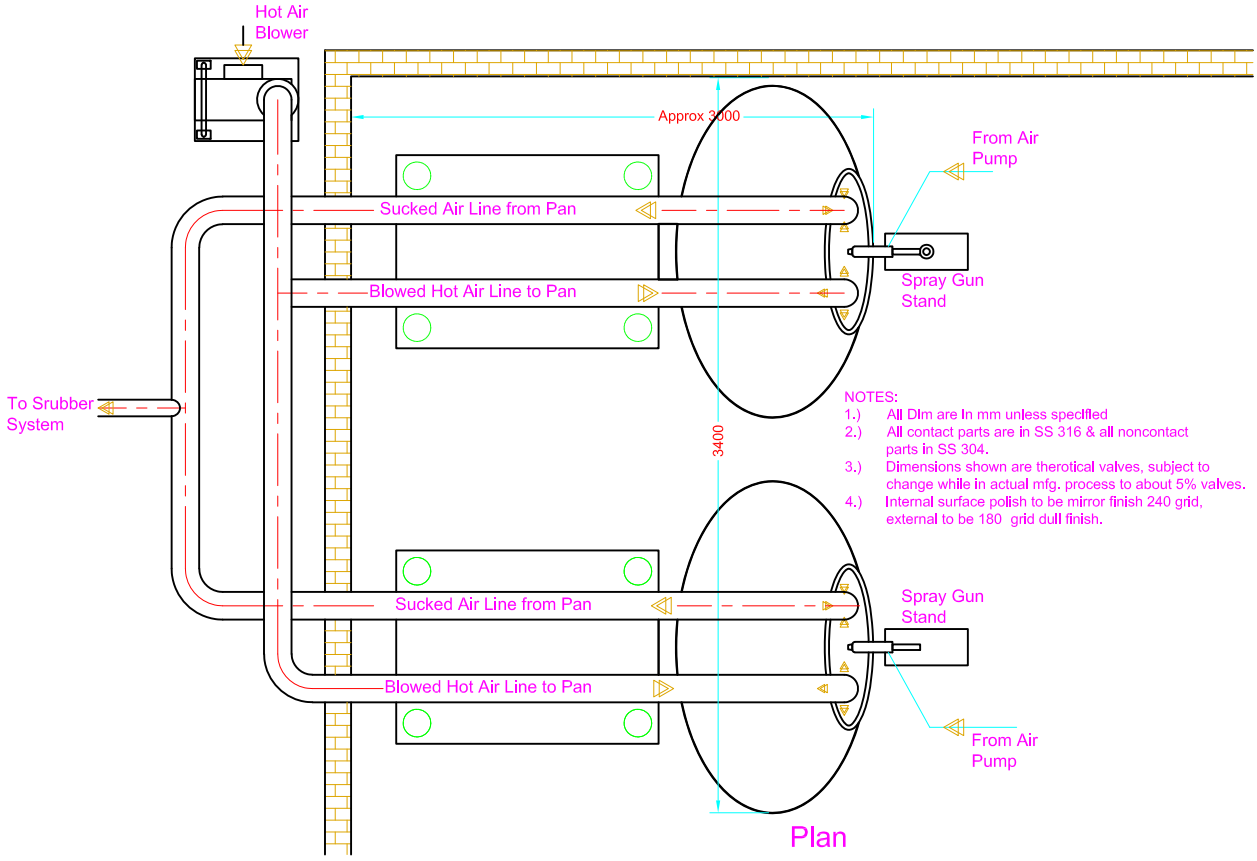

NOTES:

1.) All Dim are In mm unless specified
2.) All contact parts are in SS 316 & all noncontact parts in SS 304.
3.) Dimensions shown are therotical valves, subject to change while in actual mfg. process to about 5% valves.
4.) Internal surface polish to be mirror finish 240 grid, external to be 180 grid dull finish.